



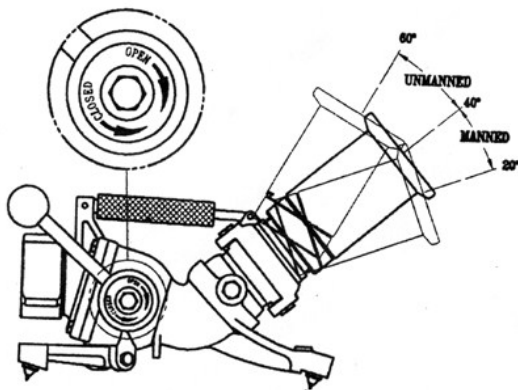

1900ltr Portable Monitor

The Flameskill 1900ltr Portable Monitor is a highly manoeuvrable and light weight monitor. A compact and low profile design makes it stable in operation for single person use. The 1900ltr Portable Monitor is also able to be used unmanned at the scene of the fire to help save on man power.

This monitor is ideal for quick attack operations with flow rates up to 1900 Litres/Min. Adjustable elevation between 30° to 60° unmanned, down to 20° when manned. Also horizontal rotation is adjustable 20° either side of the centre.

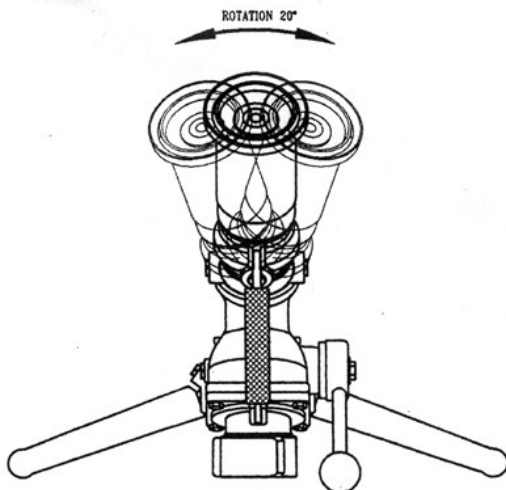

Technical Data

Maximum flow:	1900 Litres/Min
Maximum safe operation:	10 bar (150psi)
Material:	Monitor body, hard coated anodised aluminium and tough powder coating. Carbide tip spikes.
Weight:	7kg
Inlet:	2.5" Instantaneous or most International fittings
Outlet:	2.5" BSP Male

FlameSkill Ltd
1 Morton Peto Estate
Great Yarmouth
Norfolk
NR31 0LT
Tel: 01493 440464
Email: admin@flameskill.co.uk
Web: www.flameskill.co.uk