


# Detective+

## Temporary Area Monitor



- Versatile and user friendly
- Rugged, tripod design
- Loud and clear alarms
- Wireless capabilities

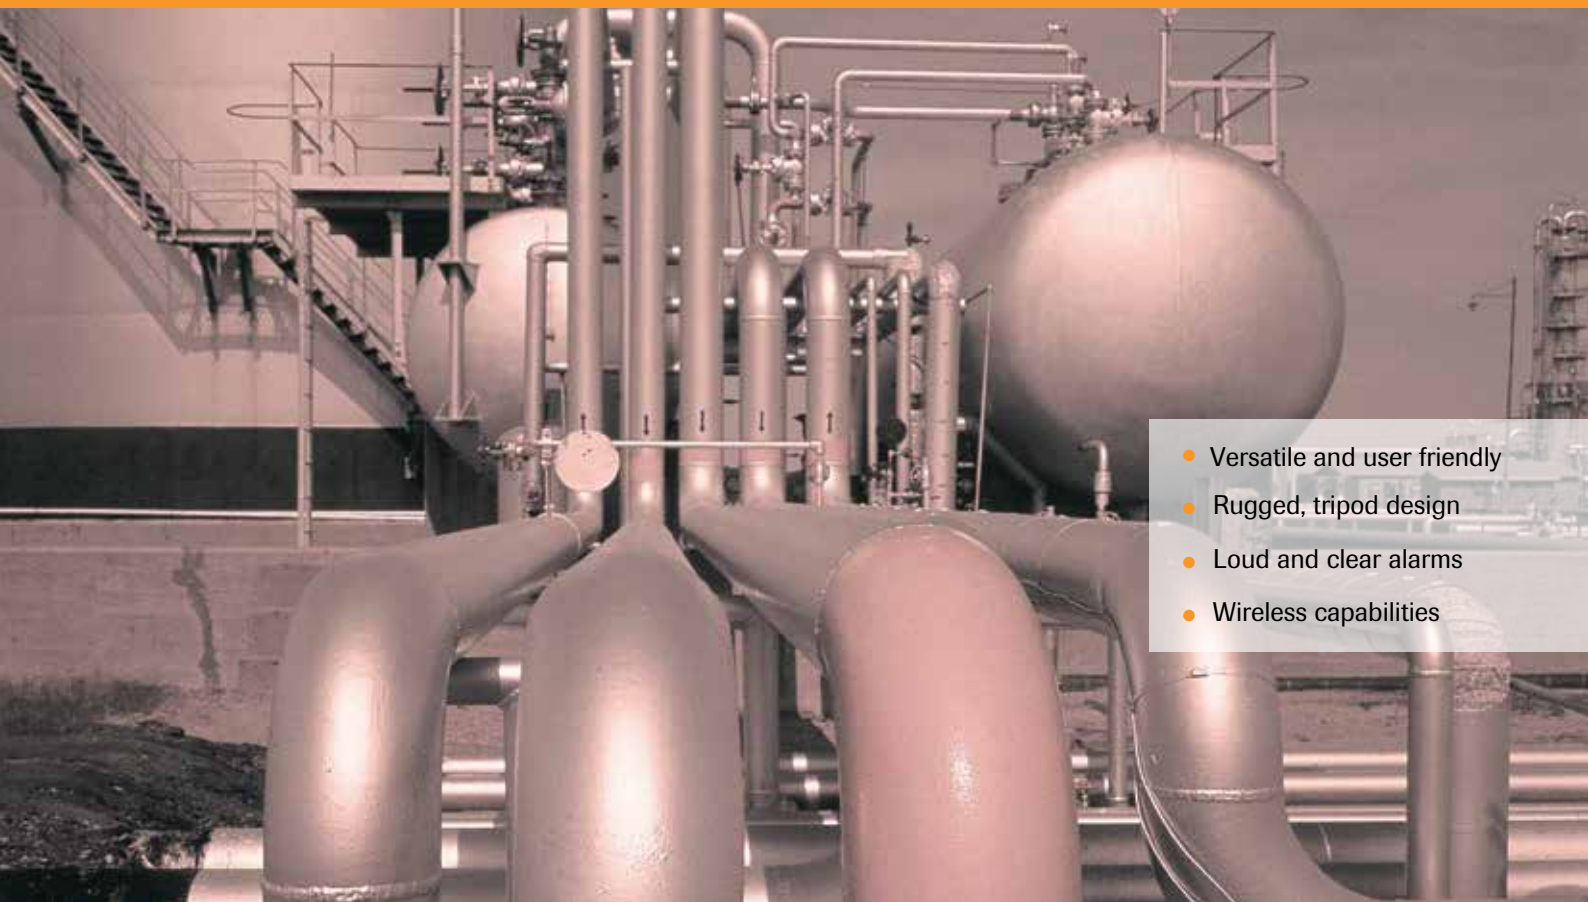

# Detective+

## Transportable Multigas Area Monitor

**When lives and property are at risk and you need gas detection equipment that is totally reliable, you need Crowcon. For over 40 years Crowcon has been developing and manufacturing high quality products with a reputation for reliability and technical innovation.**

**Crowcon provides both single gas and multigas monitors for personal and portable safety applications providing protection against a wide range of industrial gas hazards.**



### Choosing the portable gas detector for your needs

Detective+ is based on the highly successful Triple Plus+ multigas monitor for use in utility, oil and gas applications. Singly, or linked together using Detective Net, Detective+ gives a loud and clear alarm providing effective warning of gas hazards. The rugged, water and impact resistant design and clear display make Detective+ the ideal choice for your transportable gas detection needs.

#### Versatile and user friendly

Infrared sensors available	Allows sampling of highly flammable gas levels and carbon dioxide Unaffected by poisoning
Built in pump option	Provides fast response and extra sensor protection Provides sampling versatility
Clear display	Provides clear information, allows identification of gas hazard

#### Rugged, tripod design

Raised sensor apertures	Prevents water ingress
Folding or fixed leg options	Allows stacking for easier storage and transportation
IP65 specifications	Provides excellent sensor protection

#### Loud and clear alarms

25 Detective+ units may be linked together, up to 100m from adjacent units	All linked Detective+ units indicate an alarm sensed by any one unit
Units sending an alarm flash faster	Provides effective warning of gas hazards
Audible and visible confidence blip	
Vivid red LED clusters for visual alarm	
Multiple beacons	Ensures 360° visibility

**Please see the back page for full technical specifications.**

# Detective Net 433



Detective Net is a wireless module that can replace interconnecting cable for Detective and Detective+. Detective Net will transmit gas alert signals and other alarms wirelessly between Detective units using a 433MHz signal up to 100 metres in distance.

Detective Net uses the proven RICOCHET mesh network. When establishing a mesh network, Detective Net automatically selects the best line to give strongest interconnections. Should wireless connection between two devices weaken, the network will 'self-heal' and automatically re-route communications via alternate RICOCHET enabled devices, creating a mesh type network that provides a more robust and efficient wireless network.

When Detective+ goes into alarm, the signal will be sent to other units alerting the user to gas being present in the area. Detective Net will also transmit other faults, including loss of signal and battery low alarm. If the signal is weak due to heavy metal work being present the Detective Net can be used as a repeater to boost the signal between units. In a confined space the unit can use up to 20 metres of cable to position the unit in a position that will increase signal. For more ideas see the suggestions below or visit our website.




Detective Net


## Detective Net 433 Specification:

<b>Size</b>	140 x 76 x 37mm (5.5 x 3 x 1.5ins) (excluding mounting clip)
<b>Weight</b>	7.5kg (16lbs) (excluding mounting clip)
<b>Battery</b>	Non-rechargeable, 1 year plus battery life. Shelf life: 2 years
<b>Operating temperature range</b>	-20°C to +55°C (-4°F to 131°F)
<b>Humidity</b>	0% and 95% relative humidity (non-condensing) at +40°C
<b>Ingress protection</b>	IP65 & IP67
<b>Wireless range</b>	Typically 70m dependent upon physical location and environmental conditions but up to 100m possible
<b>Maximum devices</b>	Maximum number of devices in a network is 25
<b>Approvals</b>	IECEX: Ex ia IIC T4 Ga Tamb -20°C to +55°C CATEX: II 1 G Ex ia IIC T4 Ga Tamb -20°C to +55°C
<b>Compliance</b>	EN 300220-2 V2.3.3 (2010-02) EN301489-3v1.4.1 EN301489-1v1.9.2 EN50270:2006 (Type 1) EN60950-1:2006+A12:2011 IEC60950-1:2005 2nd Edition: A1:2009
<b>Available frequencies</b>	433MHz
<b>Country Approvals (wide range available, speak to your local crowcon representative)</b>	IDA Approval EQUIPMENT REGISTRATION UNDER TELECOMMUNICATIONS (DEALERS) REGULATIONS Registration Number: N2177-13 IDA Spec. No.: IDA TS SRD


## Set up scenarios:



Repeater network

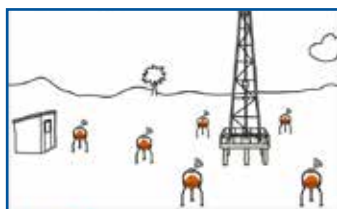

Mesh network

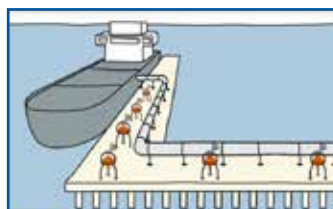

Network hopping



Ring network

For full set up scenarios visit [www.crowcon.com/uk/products/portables/detective-net](http://www.crowcon.com/uk/products/portables/detective-net)

## Detective+ Specification:

<b>Size</b>	640 x 455 x 455mm (25.2 x 17.9 x 17.9ins)
<b>Weight</b>	7.5kg (19lbs)
<b>Visible alarms</b>	Three large, top mounted red LED clusters and a single red LED on control panel. Alarm mode: LED clusters flash in quick succession. LED clusters of linked Detectives repeating the alarm, flash slower than LED lights on those Detectives sensing the hazard Normal working: Slow flashing green LED Battery low: Rapid flashing green LED
<b>Audible alarms</b>	Wailing, omni-direction siren, 104 dBA at 1m
<b>Display</b>	High contrast LCD with back light. Values and units for up to 4 gases displayed simultaneously at current, TWA or peak levels, low battery, real time and elapsed time calibration and configuration data also displayed
<b>Battery</b>	Standard 6V, 7.2Ah, sealed lead acid battery pack Optional 6V, 12Ah high capacity pack
<b>Battery life</b>	Up to 36 hours with flammable/ CO <sub>2</sub> sensor fitted with 7.2Ah battery Up to 60 hours with optional 12Ah battery pack
<b>Typical response times</b>	Methane 20s, oxygen 10s, typical toxic gas 20s, IR 20s
<b>Expected sensor life</b>	Flammable 5 years, toxic 3 years, oxygen 2 years minimum, IR>5 years
<b>Operating temperature range</b>	-20°C to +50°C (-4°F to 122°F)
<b>Humidity</b>	0-95% RH non-condensing
<b>Approvals</b>	Europe: ATEX II 2G EEx ib d IIC T4 International: IECEx EEx ib d IIC T4
<b>Standards</b>	EN50014, EN50018, EN50020, EN50104, EN45544, IEC60079-0/-1 IEC60079-11
<b>Ingress protection</b>	IP65
<b>EMC</b>	EN 50270, FCC CFR47 Part 15
<b>PC interface</b>	Via RS232 lead. Portables PC software can be used to set alarms, clock, datalogging interval and password, manages datalogging giving graphical display of instrument log file and allows to export to spreadsheet
<b>Calibration</b>	Quick calibration using internal menu command, Portables PC or the Crowcon CheckBox IMH management system
<b>Accessories</b>	Baffle plate, interconnecting leads, RS232 communications lead
<b>Sampling</b>	Internal electric sampling pump option, manual aspiration
<b>Linked Detectives</b>	Up to 12 units can be linked to provide perimeter or area monitoring

## Infrared sensors

Infrared (IR) sensors for flammable gas can be supplied as a single range, 0-100% LEL, utilising a single display channel, or as a dual range, 0-100% LEL/0-100% volume, which then occupies two display channels.

Carbon dioxide sensors are supplied as 0-5% volume. Only one IR sensor can be fitted, and IR sensors can only be used in combination with oxygen and toxic sensors.

## Radio frequency 433 MHz certified in:

Austria	Finland	Latvia	Slovakia
Belgium	France	Lithuania	Slovenia
Bulgaria	Germany	Malta	Spain
Cyprus	Greece	Netherlands	Sweden
Czech Republic	Hungary	Norway	Switzerland
Denmark	Iceland	Poland	Singapore
UK	Ireland	Portugal	Trinidad and Tobago
Estonia	Italy	Romania	United Arab Emirates

Crowcon reserves the right to change the design or specification of the product without notice. Check [www.crowcon.com](http://www.crowcon.com) for updates

[www.crowcon.com](http://www.crowcon.com)

### UK:

Tel: +44 (0) 1235 557700  
Fax: +44 (0) 1235 557718  
Email: [sales@crowcon.com](mailto:sales@crowcon.com)

### US:

Tel: +1 859 957 1039  
Toll Free: 800 527 6926  
Fax: +1 513 957 1044  
Email: [salesusa@crowcon.us](mailto:salesusa@crowcon.us)

### NL:

Tel: +31 10 421 1232  
Fax: +31 10 421 0542  
Email: [eu@crowcon.com](mailto:eu@crowcon.com)

### SG:

Tel: +65 6745 2936  
Fax: +65 6745 0467  
Email: [sales@crowcon.com.sg](mailto:sales@crowcon.com.sg)

### CN:

Tel: +86 (0) 10 6787 0335  
Fax: +86 (0) 10 6787 4879  
Email: [saleschina@crowcon.com](mailto:saleschina@crowcon.com)

### IN:

Tel: +91 22 6708 0400  
Fax: +91 22 6708 0405  
Email: [salesindia@crowcon.com](mailto:salesindia@crowcon.com)

## Gases and Ranges:

Gas	Range	Typical Alarm
<b>Flammable gas</b>	0-100 LEL	20% LEL
<b>Oxygen (O<sub>2</sub>)</b>	0-25%	19% & 23%
<b>Hydrogen sulphide (H<sub>2</sub>S)</b>	0-50ppm	10ppm
<b>Carbon monoxide (CO)</b>	0-500ppm	35ppm
<b>Sulphur dioxide (SO<sub>2</sub>)</b>	0-10ppm	2ppm
<b>Chlorine (Cl<sub>2</sub>)</b>	0-5ppm	0.5ppm
<b>Nitrogen dioxide (NO<sub>2</sub>)</b>	0-10ppm	2ppm
<b>Phosphine (PH<sub>3</sub>)</b>	0-5ppm	0.5ppm
<b>Ammonia (HN<sub>3</sub>)</b>	0-50ppm	25ppm
<b>Ammonia (NH<sub>3</sub>)</b>	0-1000ppm	n/a
<b>Hydrogen (non-flammable levels)</b>	0-2000ppm	n/a
<b>Hydrogen cyanide (HCN)</b>	0-25ppm	10ppm
<b>Hydrogen chloride (HCl)**</b>	0-10ppm	5ppm
<b>Chlorine dioxide (ClO<sub>2</sub>)<sup>+</sup></b>	0-1ppm	0.1ppm
<b>Hydrogen fluoride (HF)<sup>+</sup></b>	0-10ppm	1ppm
<b>Ethylene oxide (C<sub>2</sub>H<sub>4</sub>O)<sup>+</sup></b>	0-10ppm	5ppm
<b>Volatile organic**</b>	0-100ppm	n/a

Required ranges and alarms may vary by country and application and these can be configured as required.

\* One biased sensor per Detective+  
+ Reactive gas, care required during sampling, contact Crowcon for details.

	Range	Typical alarm(s)
<b>Flammable gas</b>	0-100% LEL	20% LEL
<b>Flammable gas</b>	0-100% v/v	None
<b>Available for methane, propane, butane or ethylene</b>		
<b>Carbon dioxide (CO<sub>2</sub>)</b>	0 to 5% v/v	0.5 and 1.5% v/v

 **CROWCON**  
Detecting Gas Saving Lives