



## Hand Powered Cutting Tool

**Part Number: FS-HCT-4120**




Hand-powered combitool with full rescue capabilities for confined space or remote locations. Also suitable for certain situations where internal combustion engines can not be operated.

- \* handle can rotate in every direction
- versatile, for every rescue operation
- less repositioning of tool ensures a fast rescue operation
- \* pump is of 2-stage type
- without load: higher operating speed for a fast rescue operation
- with load: little force needed
- \* pump and tool in one
- rescue set fits every rapid intervention vehicle
- lightweight, easy to carry and transport
- easy to use
- \* low noise level
- \* no external power source required
- \* compact as pump handle can be folded up
- easier to transport and carry, less space when stored
- \* full protection against overload
- safety guaranteed for rescuer and victim
- \* built-in double check valves
- safety guaranteed: load will be held under all circumstances

Cutting force	247 / 25.2 kN / t
Cutting opening	191 mm
Weight, ready for use	10.8 kg
Spreading	268 mm
Max. spreading force	220 / 22.4 kN / t
Min. spreading force arms closed (25mm from tips)	26.0/2.7 kN / t
Squeezing force	46 / 4.7 kN / t
Pulling range	181 mm
Pulling force	61.2 / 6.2 kN / t
Round bar	24 mm
Max. working pressure	720 / 72 bar / MPa
Temperature range	-20° – +55° °C
EN 13204	BK26/268-E-10.8

A. B. C.: 698 x 205 x 181mm

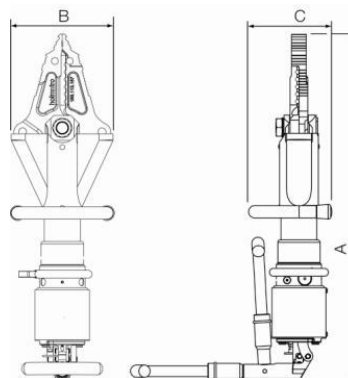

FlameSkill Ltd  
 1 Morton Peto Estate  
 Great Yarmouth  
 Norfolk  
 NR31 0LT  
 Tel: 01493 440464  
 Email: [admin@flameskill.co.uk](mailto:admin@flameskill.co.uk)  
 Web: [www.flameskill.co.uk](http://www.flameskill.co.uk)