

Polaris 1200

Water powered fire fighting foam induction motor

- Injects foam into high pressure moving water streams
- Reliable operation
- Accurate proportioning over wide range of flows and pressures
- Compatible with all fire fighting foams and potable or sea water
- Fixed or portable versions available



The Angus Fire Polaris foam induction system comprises a water motor coupled directly to a foam pump. The 8-vane water motor (Fig 1) is fitted into the main water supply pipe and is driven by the water pressure. The motor is a fully sealed unit so no water is lost during this process. The rotation speed of the water motor is directly proportional to the water flow rate.

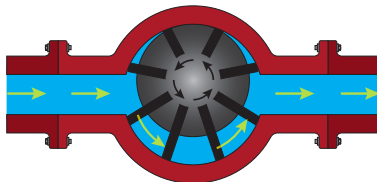


Fig 1: 8-Vane Water Motor

The water motor is coupled via a shaft to either one or two positive displacement foam injection pumps (Fig 2), which draw foam from a storage tank and into the main water pipe downstream of the water motor.

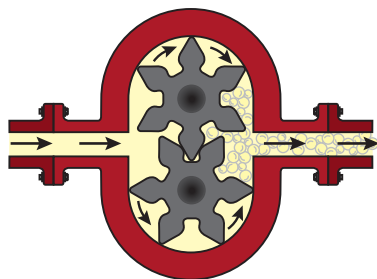


Fig 2: Foam Injection Pump

The water motor speed is directly proportional to the water flow rate, and as the water motor output shaft

is connected directly to the foam injection pump(s), the foam induction rate will always be directly related to the water flow over a wide range of flows and pressures.

The energy-efficient design of the 8-vane motor only utilises the power necessary to drive the foam induction pumps. This minimises the pressure loss in the main water stream.

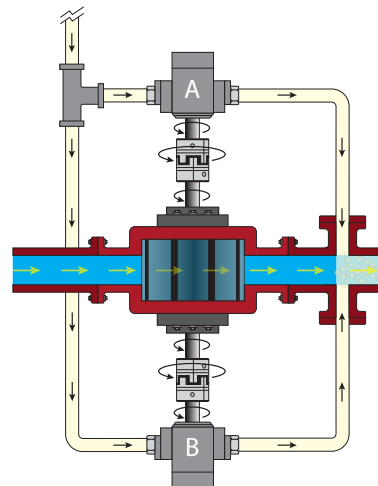


Fig 3: Schematic showing water motor and 2 foam injection pumps

Polaris may use either one foam induction pump 'A' (for single rate induction) whilst dual rate induction models use two foam pumps 'A' and 'B'. One pump is positioned on each end of the rotor shaft (Fig 3). To achieve the lower of the two induction rates, one pump is switched to operate on water only, leaving the other induction pump to supply the foam.

Materials

Water motor body, motor rotor and end plates	Bronze to EN CC491K (LG2)
Copper	85%
Zinc	5%
Lead	5%
Tin	5%
Rotor blades	Polyoxymethylene
End plate seals	Viton "O" rings
Fixings	A4 stainless steel
Frame	SS316 stainless steel
Foam pump body	Bronze
Foam pump fixings	Bronze
Foam pipe work	SS316 stainless steel
Induction rate control and bleed valves	SS316 stainless steel
Bearings	External to waterway, sealed for life, single row ball races

Induction Rate Control

Polaris induction motors are available with either single or dual rate induction. To achieve the required induction rate, Pumps A and B are set as shown below:

	Pump A	Pump B
1% single rate	1%	N/A
3% single rate	3%	N/A
6% single rate	6%	N/A
1%/3% dual rate	1%	2%
3%/6% dual rate	3%	3%

Operation

Maximum water flow rate	1200 l/min (320 US galls/min)
Minimum water flow rate	250 l/min* (70 US galls/min)
Maximum operating pressure	12 bar (180 psi)
Factory test pressure	24 bar (360 psi)
Max foam suction height	3m (10 ft)
Operating temperature range	5°C to 50°C (41°F to 122°F)
Water motor connections	65 mm (2½") threaded BSP (M) parallel; DIN 65 grooved option

Foam inlet connection (all BSP F)

1% single rate	¾"
3% single rate	1"
6% single rate	1½"
1%/3% dual rate	¾"/1"
3%/6% dual rate	1"/1"

* Flow below which the induction rate may not be achieved




Polaris 1200

Water powered fire fighting foam induction motor



**ANGUS
FIRE**

Installation Dimensions and Weights							
Dosing rate			1%	3%	6%	1%/3%	3%/6%
			Single rate	Single rate	Single rate	Dual rate	Dual rate
Water motor connection							
between inlet and outlet flanges	F	mm/inch	450/17.7	450/17.7	450/17.7	450/17.7	450/17.7
Height from baseplate	H ₁	mm/inch	420/16.5	420/16.5	420/16.5	420/16.5	420/16.5
Overall height	H ₂	mm/inch	450/17.7	450/17.7	450/17.7	450/17.7	450/17.7
Motor overhang	W	mm/inch	150/5.9	150/5.9	150/5.9	150/5.9	150/5.9
Overall length	W _s /W _o	mm/inch	555/21.9	610/24.0	660/26.0	825/32.5	880/34.6
Weight		kg/lb	72/160	83/180	104/230	101/220	113/250

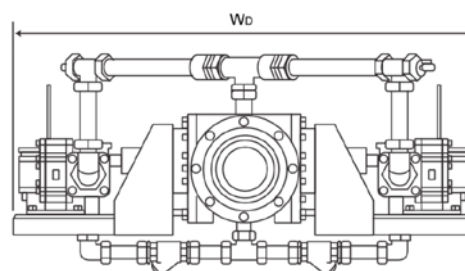

The Polaris foam induction motor is designed to work with the flow of water at a maximum of 6m/sec through a schedule 40 steel pipe of the same diameter as the water motor inlet and outlet. For the Polaris 1200, the maximum flow rate is

1200 litres/min, with an inlet size of 65mm (2½"). The energy required to power the foam pump(s) is provided by the pressure drop between the water motor inlet and outlet.

Pressure Loss							
Dosing rate			1%	3%	6%	1%/3%	3%/6%
			Single rate	Single rate	Single rate	Dual rate	Dual rate
250 lpm		bar	0.4	0.5	0.6	0.9	1.0
500 lpm		bar	0.6	0.7	0.8	1.3	1.4
750 lpm		bar	0.9	1.0	1.1	1.9	2.0
1000 lpm		bar	1.3	1.4	1.5	2.7	2.8
1200 lpm		bar	1.8	2.0	2.3	3.8	4.0

Polaris Range

Model	Flow l/min (max)	Inlet size
Polaris 1200	1200	65mm (2½")
Polaris 2400	2400	100mm (4")
Polaris 3200	3200	125mm (5")
Polaris 4000	4000	125mm (5")
Polaris 6000	6000	150mm (6")
Polaris 8000	8000	200mm (8")

Options

- Portable model with light alloy motor body, hard anodised working surfaces and Cam-Lock foam inlet
- Sprinkler system model



INTERNATIONAL SALES

Angus Fire Ltd

Angus House, Haddenham Business Park,
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

UK SALES

Angus Fire Ltd

Station Road, Bentham, Lancaster, LA2 7NA, UK
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.